


TRIDENT F

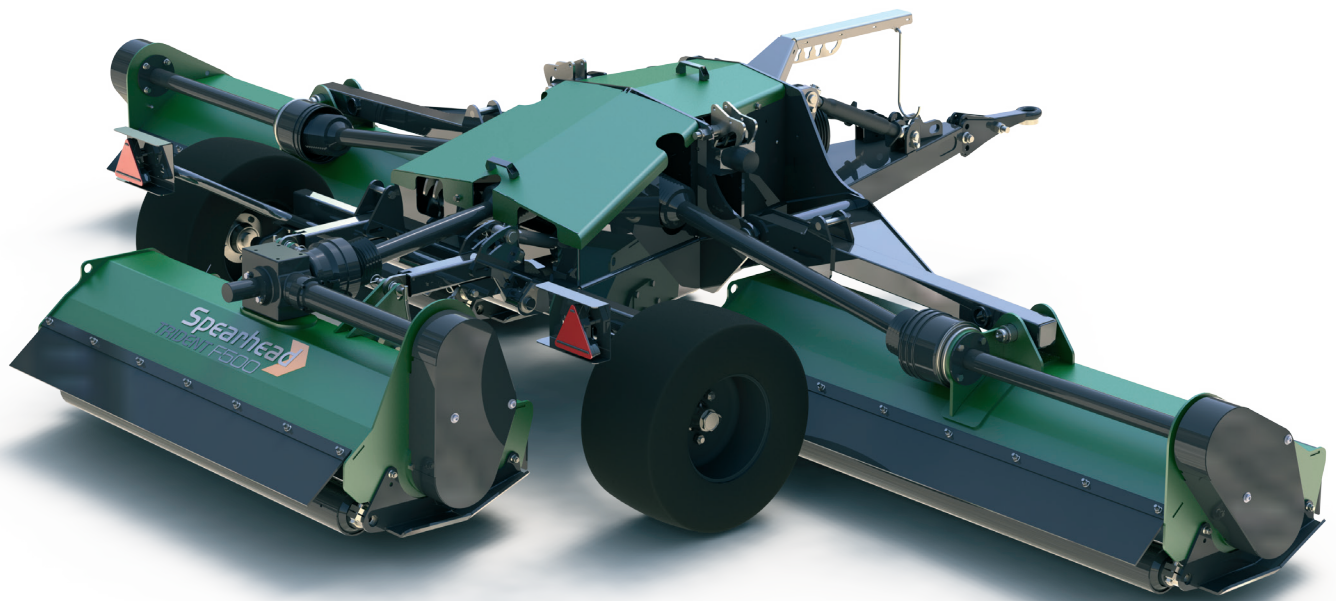

Features

- 4.00m, 5.00m and 6.00m cutting widths
- 10mm to 120mm cutting heights
- 20mm max cutting diameter
- 540rpm PTO
- Overrun PTO protection
- 139mm diameter full width rollers
- Front and Rear rubber flaps
- Turf tyres
- Hydraulically folding to transport width of 2.70m
- Automatic transport latches
- Rear LED lighting kit

Specification	Trident F 400	Trident F 500	Trident F 600
Cutting width	4.0m (13' 1")	6.0m (19' 8")	6.0m (19' 8")
Overall width	4.3m (14' 1")	5.3m (17' 5")	6.3m (20' 8")
Transport width	2.7m (8' 10")	2.7m (8' 10")	2.7m (8' 10")
Machine weight	TBC	TBC	TBC
Gearbox rating	120hp	120hp	120hp
Cutting range	10-120mm	10-120mm	10-120mm
Cutting unit overlap	100mm	100mm	100mm
Number of flails	144	168	200
PTO protection	Input PTO Clutch	Input PTO Clutch	Input PTO Clutch
PTO speed	540rpm	540rpm	540rpm
Tractor power required*	90hp	100hp	120hp

* Dependent on conditions