

TWIGA Flex

The TWIGA Flex range of hedge and verge mowers are the latest specification machines from Spearhead and offer optimum safety, comfort and control for the professional operator.

A specialist range of mowers with the in-built Rotorflex system allow a complete working range through 140 degrees. Available for Rear, Front or Reverse Drive mounting the TWIGA Flex is the most versatile piece of equipment in the Spearhead catalogue and one that offers a huge amount of output potential.

Encompassing reaches from 6.7 metres through to 8.9 metres the TWIGA Flex series is able to handle the most demanding and diverse cutting situations that you are ever likely to face.



- Propilot Controls
- Three Point Linkage Mounting
- Left Hand or Right Hand Build Option
- Cushion Top Link
- Parallel Arm Geometry
- Totally Independent 80HP Piston Hydraulic System
- Cast Iron Pumps and Motor
- Heavy Duty Cast Iron Gearbox
- Hydraulic Slew and Two Stage Safety Breakaway
- Oil Cooler
- 220 Litre Oil Capacity
- 1.2 Metre MP1 Flailhead

Optional Extras

- Arm Float Kit
- Autopilot
- Axle Mounting System
- Debris Blower Kit
- Hydraulic Oil
- Belt Drive Flailhead

MODEL	TWIGA FLEX 670	TWIGA FLEX 740	TWIGA FLEX 800T	TWIGA FLEX 890T
Maximum reach	6.7m	7.4m	8.0m	8.9m
Machine weight*	TBC	TBC	2550kg	2660kg
Oil tank capacity	220ltr	220ltr	220ltr	220ltr
Transport width	2.2m	2.2m	2.2m	2.2m
Piston totally independent hydraulics	STD	STD	STD	STD
3-point linkage	STD	STD	STD	STD
Axle mounting	Option	Option	Option	Option
Tractor power required**	100-130hp	120-150hp	120-150hp	140-170hp
Tractor weight required**	4500kg	4750kg	5000kg	6000kg

*Dependant on machine specification (including oil, excluding flailhead or attachment)
 **Dependant on conditions




	A	B	C	D	E
TWIGA FLEX 670	6.7m	6.5m	4.8m	6.6m	5.1m
TWIGA FLEX 740	7.4m	7.2m	5.5m	7.3m	5.8m
TWIGA FLEX 800T	8.0m	7.8m	6.1m	7.9m	6.4m
TWIGA FLEX 890T	8.9m	8.7m	7.0m	8.8m	7.3m




TWIGA Flex


The TWIGA Flex is available in four different reaches to provide a versatile cutting solution. By incorporating the rotorflex head angling system the machine is able to cut in any position throughout its 140 degree operating plain – even directly behind the tractor.

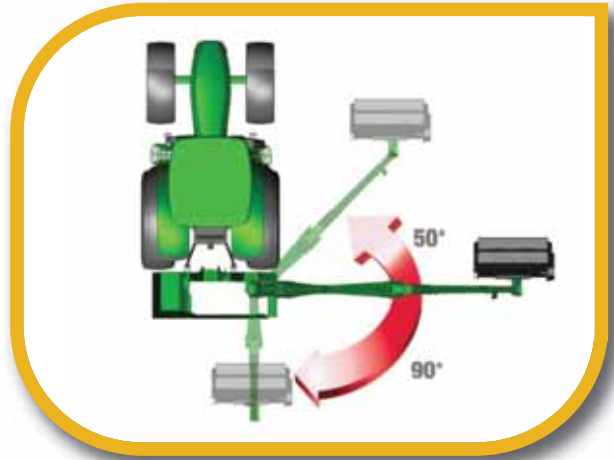

Rear Three Point Linkage Mounted Option

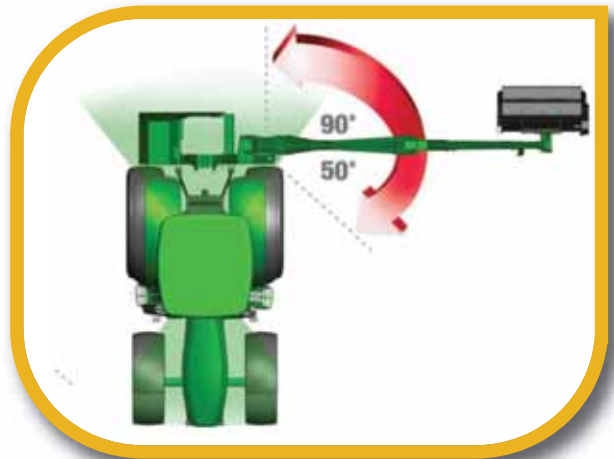

Reverse Drive Three Point Linkage Mounted Option

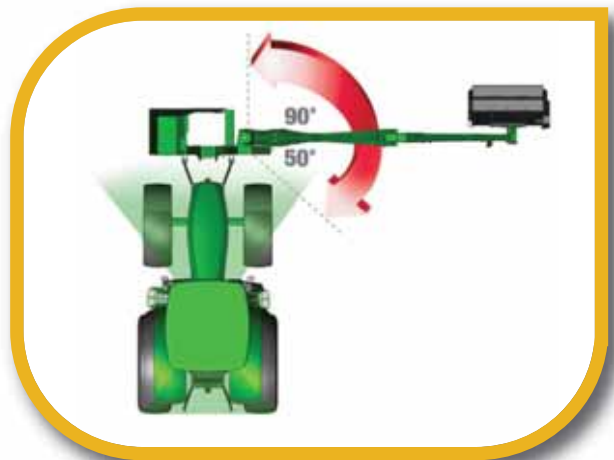

Front Three Point Linkage Mounted Option

