

TWIGA Orbital


- Precision Proportional Controls
- Ability to Cut Either Side Of The Machine
- Cushion Top Link
- Rear Lighting Kit
- Parallel Arm Geometry
- Telescopic Dipper Arm (726T & 836T)
- Totally Independent 80HP Piston Hydraulic System
- Cast Iron Pumps and Motor
- Heavy Duty Cast Iron Gearbox
- Hydraulic Power Slew and Safety Breakaway
- Oil Cooler
- 230 Litre Oil Capacity
- 1.2 Metre DP Belt Drive Flailhead
- Axle Mounting System

Optional Extras

- Autopilot
- Hydraulic Oil

MODEL	606	686	726T	836T
Maximum reach	6.0m	6.8m	7.2m	8.3m
Machine weight*	2155kg	2312kg	2372kg	2400kg
Oil tank capacity	230ltr	230ltr	230ltr	230ltr
Transport width	2.4m	2.4m	2.4m	2.4m
Piston totally independent hydraulics	STD	STD	STD	STD
3-point linkage	N/A	N/A	N/A	N/A
Axle mounting	STD	STD	STD	STD
Road lighting kit	STD	STD	STD	STD
Tractor power required**	120hp	130hp	140hp	150hp
Tractor weight required**	4500kg	4750kg	5000kg	6000kg

*Dependant on machine specification (including oil, excluding flailhead or attachment)
 **Dependant on conditions

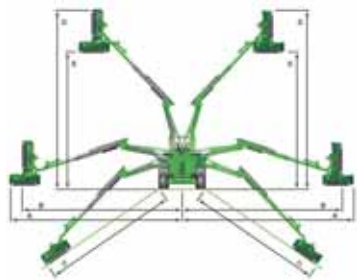

	A	B	C	D	E
TWIGA Orbital 606	6.2m	5.7m	4.4m	6.6m	4.5m
TWIGA Orbital 686	6.9m	6.4m	5.1m	7.3m	5.2m
TWIGA Orbital 726T	7.5m	7.0m	5.7m	7.9m	5.8m
TWIGA Orbital 836T	8.4m	7.9m	6.6m	8.8m	6.7m

