


SPEARHEAD

MULTICUT 460 PROLINE



MULTICUT 460 FEATURES

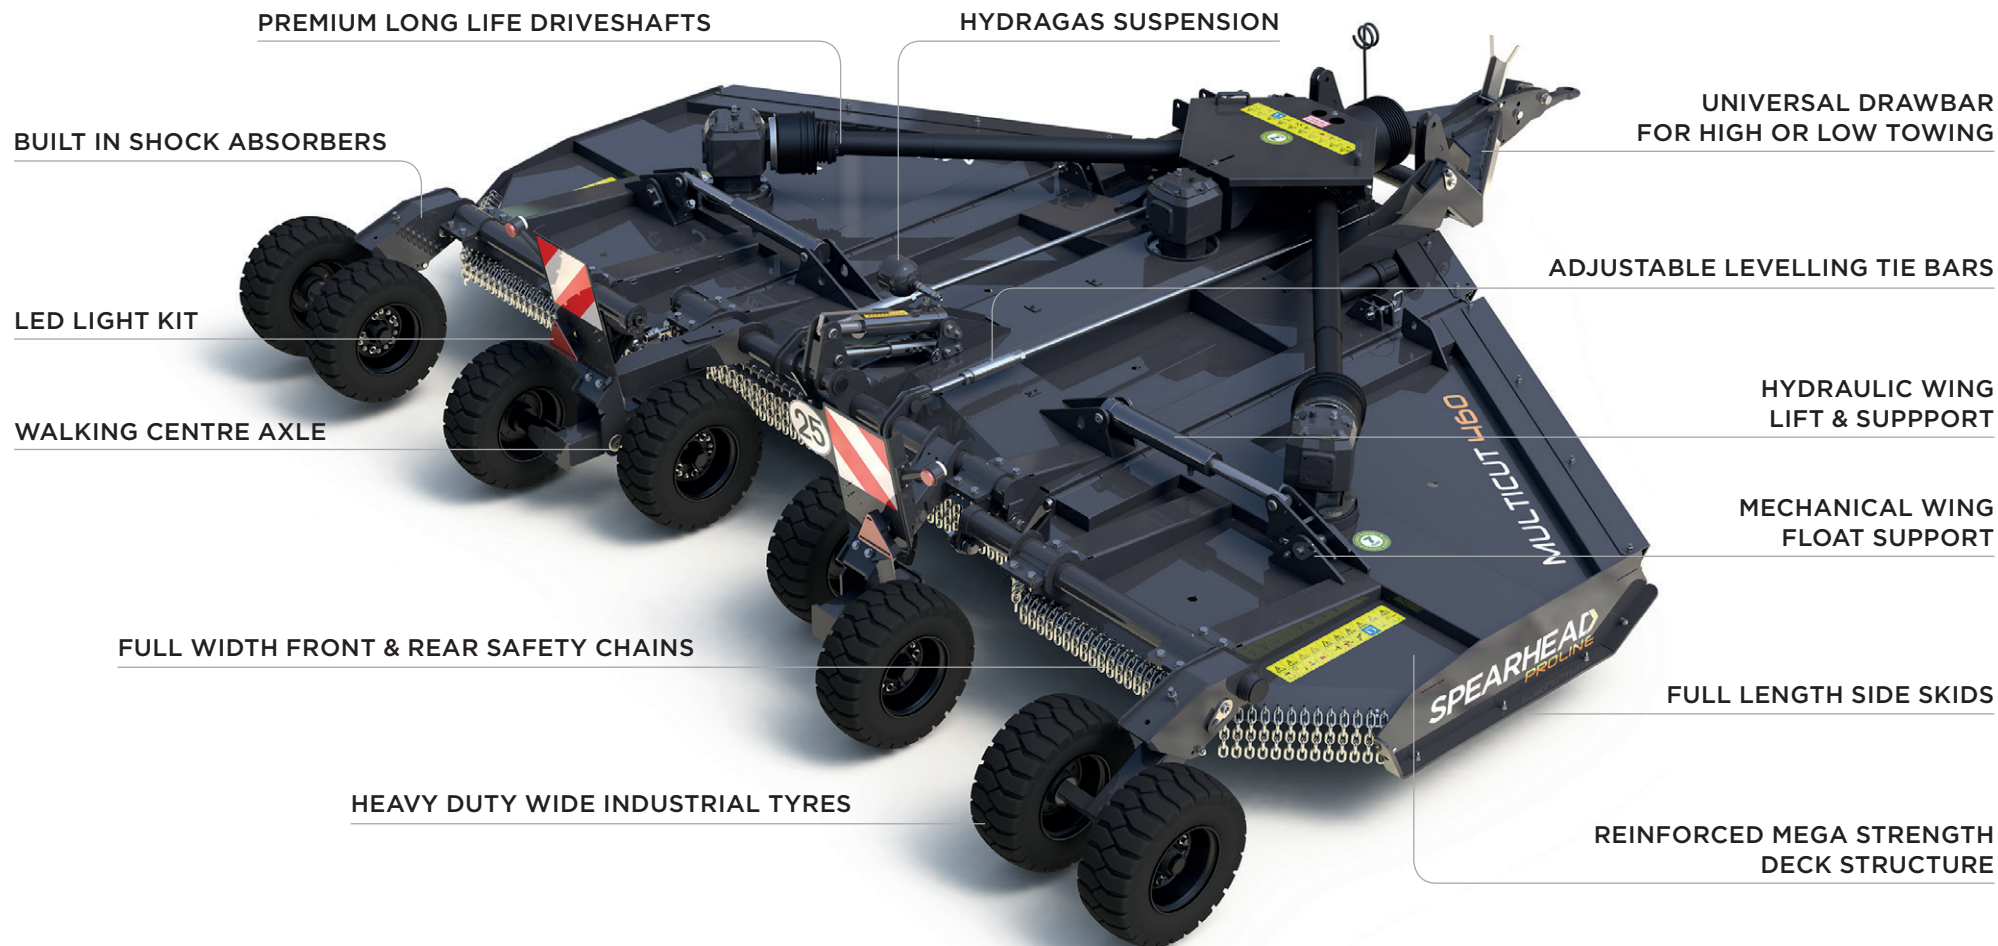

MULTICUT 460 PROLINE

UNIT OPTIONS



TRACTOR HP

100hp



PTO SPEED

1000rpm



TRANSPORT WIDTH

2.70m / 8' 11"



CUTTING WIDTH

4.60m / 15' 11"



GEARBOX RATING

250hp & 165hp



NUMBER OF WHEELS

8



NUMBER OF ROTORS

3



NUMBER OF BLADES

18



CUTTING HEIGHT

25 - 400mm
1" - 16"



6, 8 or 21 SPLINE PTO



SWIVEL TOWING EYE



K80 TOWING HITCH



FRONT FLAP KIT




ALTERNATIVE GEARBOX
ROTATION



FRONT GUIDE WHEELS

MULTICUT 460 THE CHOICE OF THE PROFESSIONAL

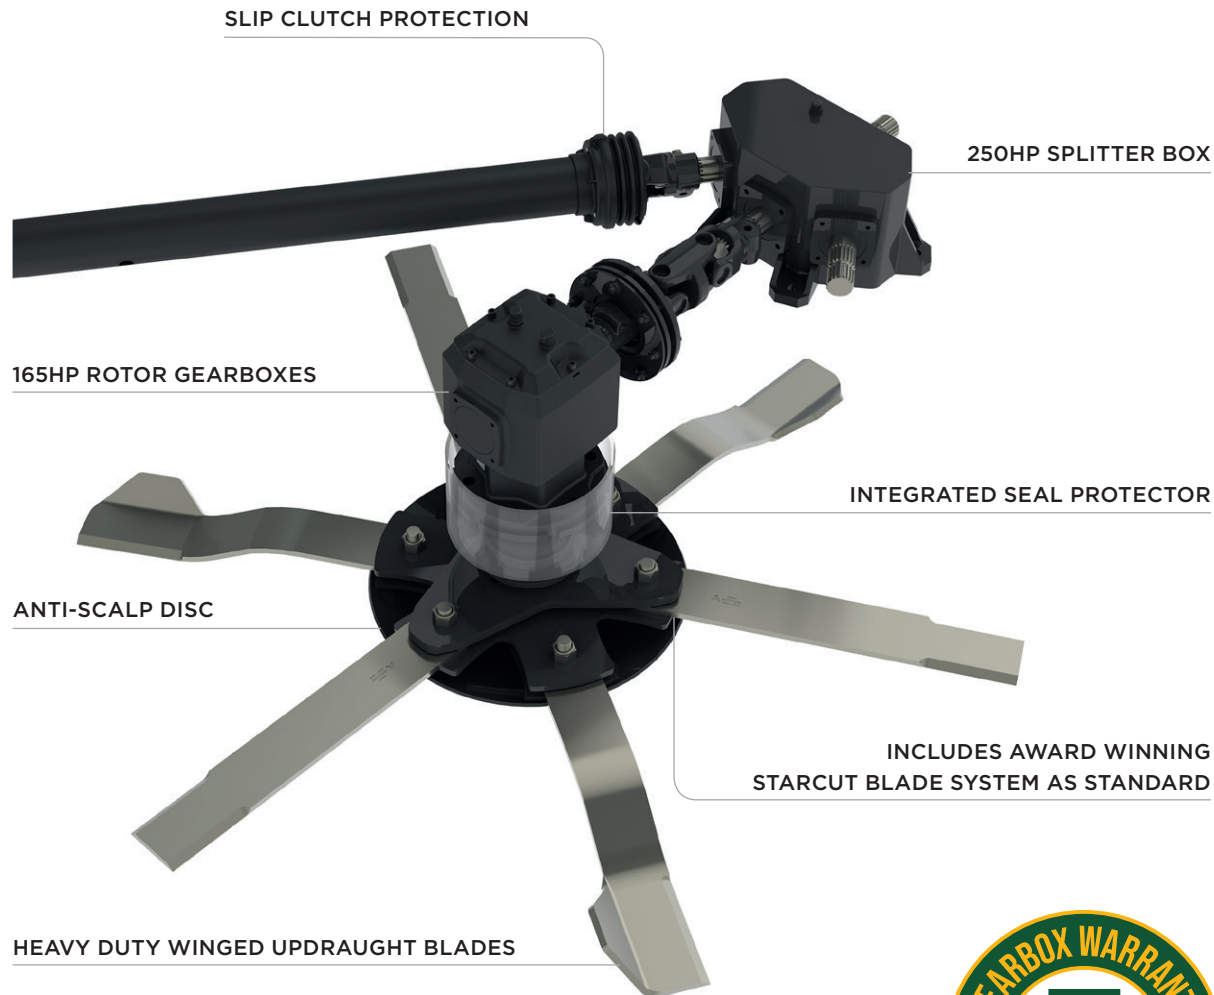

Action packed with all of the great features of the standard Multicut 460 — the standard bearer in rotary mowing equipment, the Proline machine features a suite of upgrades that further enhance reliability and performance.

A smooth ride is paramount with the standard walking axle design ensuring increased ground contour following and reduced shock loads through road transport, with the added benefit of Hydragas Suspension for the most comfortable ride.

Wider wheels are also fitted to add additional comfort but also to ensure reduced ground pressure in tough field conditions.

Similarly the machine is hardware equipped with a Euro LED light kit and importantly features Spearhead's STARCUT 6-blade system for increased mulching capability in applications such as Stubble Management.

Delivering more driveline power than previously, the Multicut 460 comes complete with high specification 165hp rotor gearboxes designed for the most demanding of work environments certified with Spearhead's extended 7 year gearbox warranty.

STANDARD SPECIFICATION		MULTICUT 460 PROLINE	
Machine weight*	2630kg / 5798lbs	Deck construction	All welded construction
Hitch	Multi-positional drawbar	Deck material thickness	6mm (1/4")
Cutting width	4.60m / 15' 1"	Side skirt material thickness	5mm (3/16")
Working machine width	4.79m / 15' 9"	Skid construction	Replaceable bolt on skid shoes
Transport machine width	2.70m / 8' 11"	Anti-scalp dish	6mm (1/4") pan round with blade holder bar
Maximum working length	4.91m / 16' 2"	Blades standard (x9)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging high lift - low friction. Handed
Transport length	4.83m / 15' 11"	Blades Starcut (x9)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging - low friction. Non-handed
Deck height**	0.23m / 9"	Blade bolts	M24 C/W shank grade 8.8
Transport height	2.06m / 6' 9"	Blade tip speed (1000rpm)	84mps / 16535fpm
Cutting height	25mm - 400mm (1" - 16")	Driveline	ASAE Category 6
Cutting capacity	100mm / 4"	Driveline protection	2-way slip clutches on rotor gearboxes. Overrun on input shaft
Recommended tractor HP	100hp / 75kW	Centre deck tailwheel mount assembly	Tubular welded walking axle
Wing working angles	45° up / 15° down	Wing deck tailwheel mount assemblies	Tubular welded standard axles
Power take-off speed	1000rpm	Tailwheels (x8)	600-9 10 PLY pneumatic tyre with steel rim
Gearbox [splitter]	Cast Iron housing	Front guard	Single chain guards on each deck
Gearbox [rotor gearboxes (x3)]	Cast Iron housing	Rear guard	Single chain guards on each deck
Input Shaft	1-3/8" Z6 SFT 6 tractor end		
Gearbox lubricant [splitter]	EP80-90W or GL-4 / GL-5 oil		
Gearbox lubricant [rotor]	85W-140 oil		
Gearbox oil capacity [splitter gearbox]	2.7 litres / 4.7 pints		
Gearbox oil capacity [rotor gearboxes (x3)]	4.3 litres / 7.6 pints		

* With front and rear single chain guards ** Underside of deck to skid



📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England ☎ +44 (0)1789 491860

✉ enquiries@spearheadmachinery.com 💻 spearheadmachinery.com 🐦 SpearheadWorld



designed and built in
GREAT BRITAIN

